



When the test voltage is 220V50Hz, such as FIG.2 voltage and pulse width.

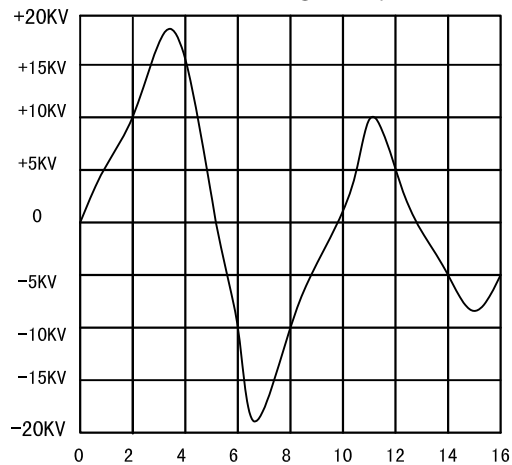

TYPICAL WAVEFORM AT THE H.V. POINT WITH PULSE WIDTH IN THE TRANSFORMER INTO A 20PF LOAD

FIG.2



NOTES:

注释:

- 1.PRIMARY: 23 ± 1/2 TURN 1UEW-0.45;
初级: 23 ± 1/2圈 1UEW-0.45;
- 2.SECONDARY: 3420 TURN 1UEW-0.057;
次级: 3420圈 1UEW-0.057;
- 3.HYPOT 1250VAC. BETWEEN PRIMARY AND SECONDARY;
初次级之间的耐压1250VAC;
- 4.THE USE OF TEMPERATURE - 40~85 ° C;
使用温度-40~85 ° C;
- 5.FILL MATERIAL: EPOXY,VACUUM FORMED;
填充材料: 环氧树脂, 真空形成;
- 6.PEAK PRIMARY CURRENT: 60 AMPS;
峰值电流: 60安培;
- 7.ADDITIONAL ELECTRICAL SPEC'S.(FOR REF.ONLY)
PRIMARY: 0.076 OHMS ± 20%,18uH ± 15%;
SECONDARY:1150 OHMS ± 20%, 340mH ± 15%;
MEASURED AT 1KHz,75° F
电气测试参数 (参考)
初级:0.076Ω ± 20%,18uH ± 15%;
次级: 1150Ω ± 20%, 340mH ± 15%;测量在1 kHz, 75° F
- 8.SPARK VOLTAGE: >18KV(CL=20PF);DISCHARGE PULSE:5 ± 2us;
输出高压: >18KV (CL=20PF);放电脉宽: 5 ± 2us;
- 9.INSULATION RESISTANCE >100M OHMS;
绝缘电阻>100M Ω;
- 10.OUTPUT TERMINAL BY TENSION TEST, DRAWING FORCE GREATER THAN 3kgf.cm;
高压输出端子用拉力仪测试, 拉拔力应大于3kgf.cm;
- 11.OUTPUT TERMINAL WITH A TORSION TESTER,TORQUE GREATER THAN 8kgf.cm.
高压输出端子用扭力仪测试, 扭力应大于8kgf.cm.

产品 PRODUCT	HT	规格名称 STANDARD&NAME	1010-024A	物料编码 Material NO	1.010.024A	文件名称 DRAWING NAME	成品规格书		
		材质 MATERIAL	厚度 THICKNESS	完成 FINISH	单位 UNIT	比例 SCALE	文件编号 DRAWING NO.	PDS-HT-005	
				2010.07.21	mm		页数 PAGE	1	版本 VERSIONS
									1.0
		承认 APPROVE	检图 CHECK	设计 DESIGN	GEI Inc.				
		年月日 DATE	订正 REVISE	www.gei-inc.com					