

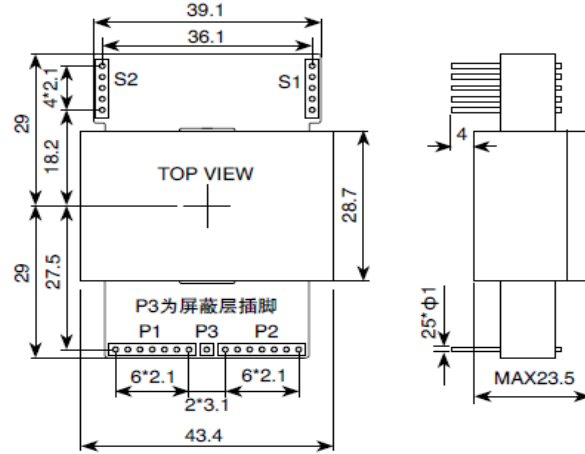


GHSEE43 2000W

Standard: GB/T14860和Q/MM162-2013

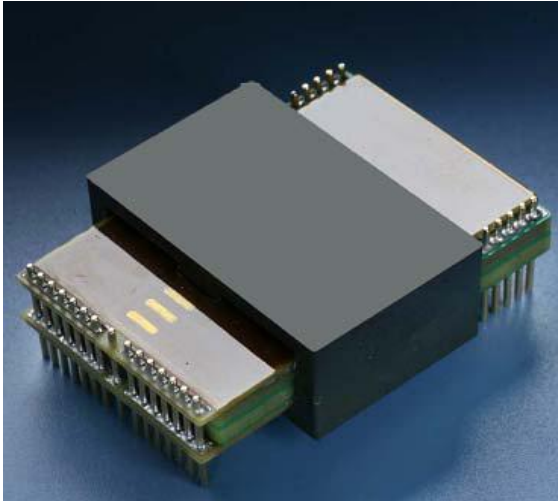

Features and applications:

- EE43 core
- Application: DC/DC
- Output power: 2000W MAX
- Working frequency: 100KHz - 200KHz
- Outer dimension: 58mm×43.5mm×23.5mm (MAX)
- HI-POT (P-S): 1.5KVDC
- Working temperature: -40 °C - 85 °C
- Weight : ≤ 185g

Data:

Part No.	Turn Ratio	Pri N1			Sec N2	Note
	N1:N2	Inductance (μH)	Leakage Ind. (μH) MAX	DCR (mΩ) MAX	DCR (mΩ) MAX	
GHSEE43T201	1:10	7.2 MIN	0.4	0.2	9.0	P3 is shielded winding
GHSEE43T202	1:11	7.2 MIN	0.4	0.2	10.0	
GHSEE43T203	2:20	35.5 MIN	0.5	0.4	22.0	
GHSEE43T204	2:21	35.5 MIN	0.5	0.4	25.0	
GHSEE43T205	18:17	2100.0 MIN	0.5	35.0	30.0	