

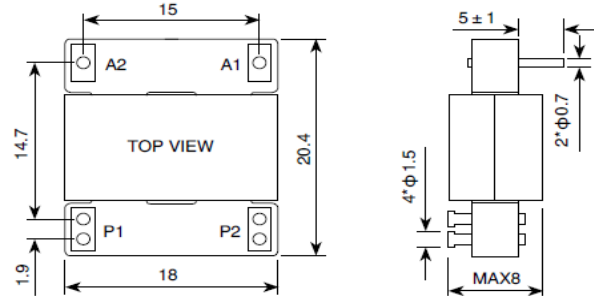


# GHSEI18 30A

Standard: GB/T14860和Q/MM162-2013

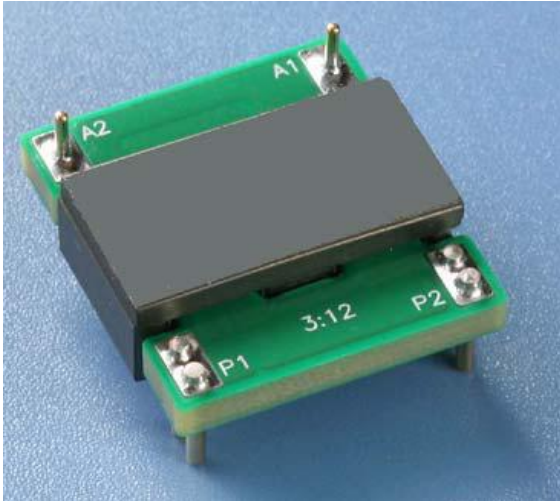

## Features and applications:

- EI18 core
- Application: DC/DC output filter
- Rate output current: 30A RMS
- Working frequency: 200KHz - 500KHz
- Outer dimension: 20.4mm×18mm×8mm (MAX)
- HI-POT (winding to core): 1.5KVDC
- Working temperature: -40 °C - 85 °C
- Weight : ≤ 9.5g

## Data:

Part No.	Turn Ratio	Inductance	DCR (mΩ) MAX	Rated output current(A)
GHSEI18L150	3:12(AUX)	1.5±10%	3.0	30 RMS
GHSEI18L200	3:12(AUX)	2.0±10%	3.0	30 RMS
GHSEI18L250	3:12(AUX)	2.5±10%	3.0	30 RMS