
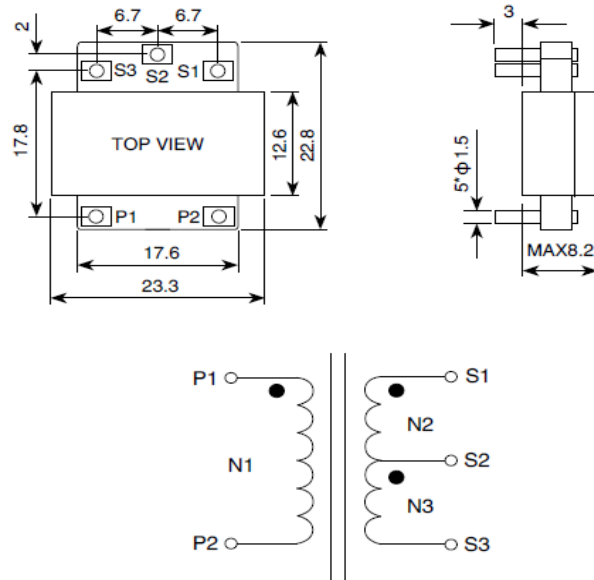


GHSER23-B 120W

Standard: GB/T14860和Q/MM162-2013

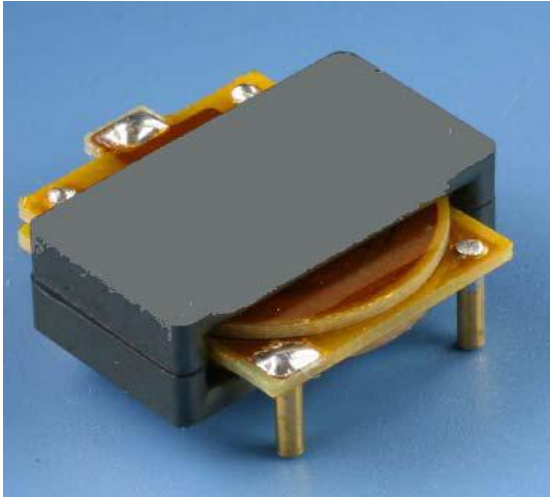

Features and applications:

- ER23 core
- Application as DC/DC
- Output power: 120W MAX
- Working frequency: 200KHz - 300KHz
- Outer dimension: 23.5mm×23mm×8.2mm (MAX)
- HI-POT (P-S): 1.5KVDC
- Working temperature: -40 °C - 85 °C
- Weight : ≤ 14g

Data:

Part No.	Turn Ratio	Pri N1 (P1-P2)			Sec N2	Sec N3
	N1:(N2+N3)	Inductance (μH)	Leakage Ind. (μH) MAX	DCR (mΩ) MAX	DCR (mΩ) MAX	
GHSER23T301	2:(2+2)	12.0 MIN	0.5	0.9	1.1	1.1
GHSER23T302	2:(3+3)	12.0 MIN	0.5	1.1	33.0	33
GHSER23T303	2:(5+5)	12.0 MIN	0.5	0.9	8.2	8.2
GHSER23T304	3:(1+1)	28.0 MIN	0.5	2.9	0.4	0.4
GHSER23T305	4:(2+2)	50.0 MIN	0.5	4.2	2.8	2.8
GHSER23T306	4:(3+3)	50.0 MIN	0.5	4.2	3.5	3.5
GHSER23T307	4:(4+4)	50.0 MIN	0.5	4.2	4.8	4.8