
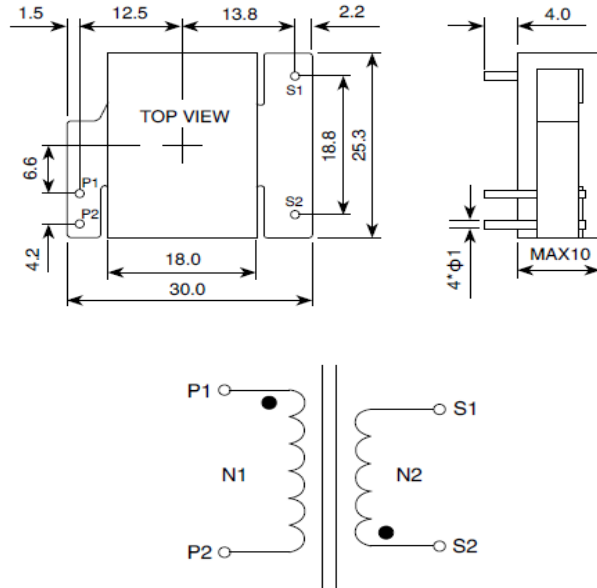


# GHSER25-A 250W

Standard: GB/T14860和Q/MM162-2013

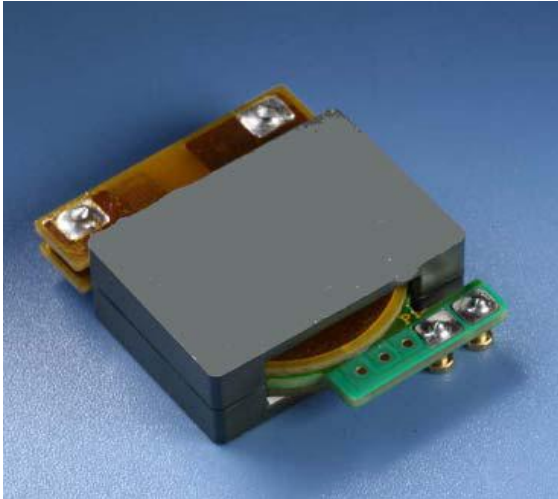

### Features and applications:

- ER25 core
- Application: AC/DC forward circuit
- Output power: 250W MAX
- Working frequency: 200KHz - 300KHz
- Outer dimension: 30mm×25.4mm×10mm (MAX)
- HI-POT (P-S): 3.0KVDC
- Working temperature: -40 °C - 85 °C
- Weight : ≤ 26.5g

### Data:

Part No.	Turn Ratio	Pri N1 (P1-P2)			Sec N2 (S1-S2)
	N1:N2	Inductance (μH)	Leakage Ind. (μH) MAX	DCR (mΩ) MAX	DCR (mΩ) MAX
GHSER25T201	16:1	1100.0 MIN	3.0	110.0	0.6
GHSER25T202	16:2	1100.0 MIN	3.0	110.0	1.1
GHSER25T203	16:3	1100.0 MIN	3.0	110.0	2.8
GHSER25T204	16:4	1100.0 MIN	3.0	110.0	4.5