
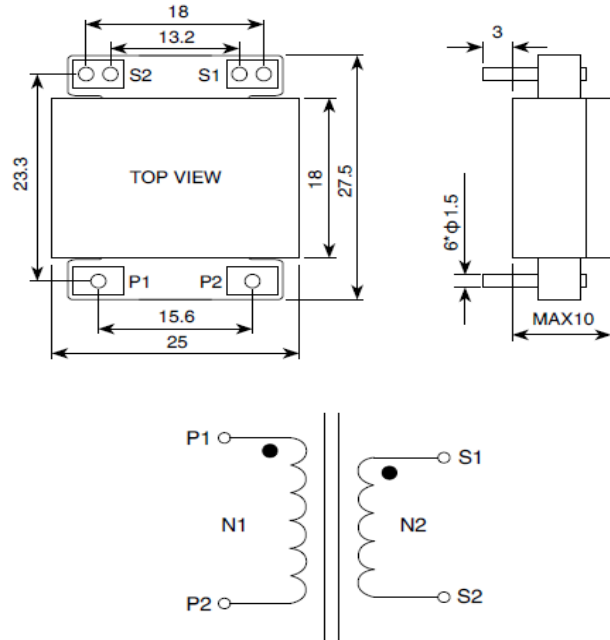


GHSER25-B 250W

Standard: GB/T14860和Q/MM162-2013

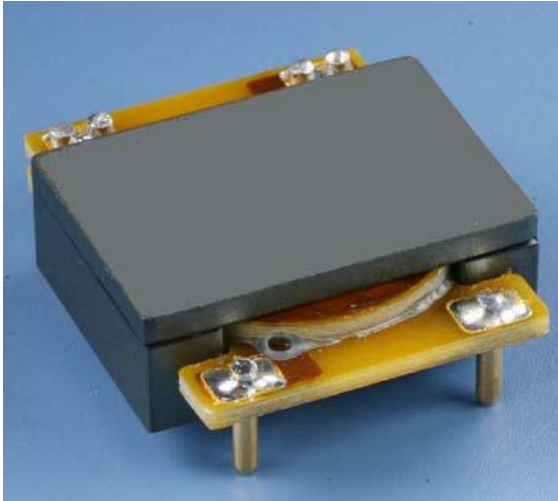

Features and applications:

- ER25 core
- Application: DC/DC forward circuit
- Output power: 250W MAX
- Working frequency: 200KHz - 300KHz
- Outer dimension: 27.5mm×25.4mm×10mm (MAX)
- HI-POT (P-S): 1.5KVDC
- Working temperature: -40 °C - 85 °C
- Weight : ≤ 27g

Data:

Part No.	Turn Ratio	Pri N1 (P1-P2)			Sec N2 (S1-S2)
	N1:N2	Inductance (μH)	Leakage Ind. (μH) MAX	DCR (mΩ) MAX	DCR (mΩ) MAX
GHSER25T205	2:2	22.0 MIN	0.5	1.6	0.8
GHSER25T206	3:2	50.0 MIN	0.5	2.5	0.8
GHSER25T207	3:3	50.0 MIN	0.5	2.5	1.1
GHSER25T208	4:2	88.0 MIN	0.5	5.5	0.8
GHSER25T209	4:3	88.0 MIN	0.5	5.5	1.1
GHSER25T210	4:4	88.0 MIN	0.5	5.5	3.0
GHSER25T211	14:2	250.0 MIN	1.5	95.5	1.0
GHSER25T212	16:2	250.0 MIN	1.5	115.5	0.8