

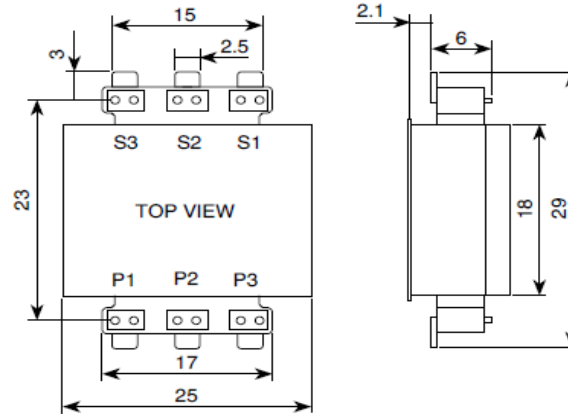


GHSER25-C 250W

Standard: GB/T14860和Q/MM162-2013

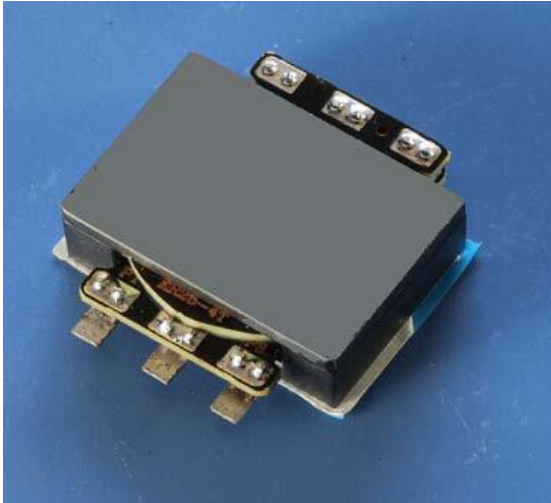

Features and applications:

- ER25 core
- Application: DC/DC forward circuit
- Output power: 250W MAX
- Working frequency: 200KHz - 500KHz
- Outer dimension: 29mm×25.4mm×10mm (MAX)
- HI-POT (P-S): 1.5KVDC
- Working temperature: -40 °C - 85 °C
- Weight : ≤ 25g

Data:

Part No.	Turn Ratio	Pri N1+N2			Sec N3+N4
	(N1+N2): (N3+N4)	Inductance (μ H)	Leakage Ind. (μ H) MAX	DCR (m Ω) MAX	DCR (m Ω) MAX
GHSER25T401	(2+2):(4+4)	17.5 MIN	0.5	3.1	6.3+6.3