

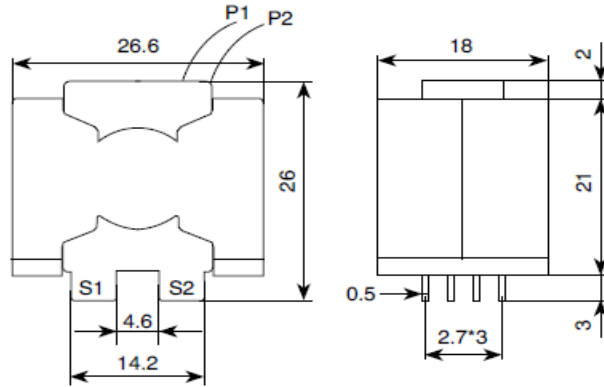


GHSPQ26 280W

Standard: GB/T14860和Q/MM162-2013

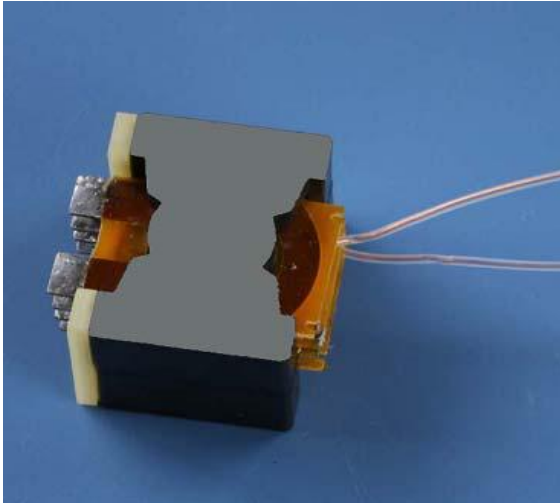

Features and applications:

- PQ26 core
- Application: DC/DC forward circuit
- Output power: 280W MAX
- Working frequency: 200KHz - 400KHz
- Outer dimension: 27mm×26mm×18mm (MAX)
- HI-POT (P-S): 1.5KVDC
- Working temperature: -40 °C - 85 °C
- Weight : ≤ 45g

Data:

Part No.	Turn Ratio	Pri N1+N2 (P1-P2)			Sec N2 (S1-S2)
	N1:N2	Inductance (μH)	Leakage Ind. (μH) MAX	DCR (mΩ) MAX	DCR (mΩ) MAX
GHSPQ26T201	16:1	330.0 MIN	10.0	30.0	0.25
GHSPQ26T202	16:2	330.0 MIN	10.0	30.0	0.80
GHSPQ26T203	56:1	1500.0 MIN	30.0	300.0	0.25
GHSPQ26T204	80:1	3000.0 MIN	36.0	550.0	0.12