


EXTERNAL DIMENSIONS (Unit:m/m)

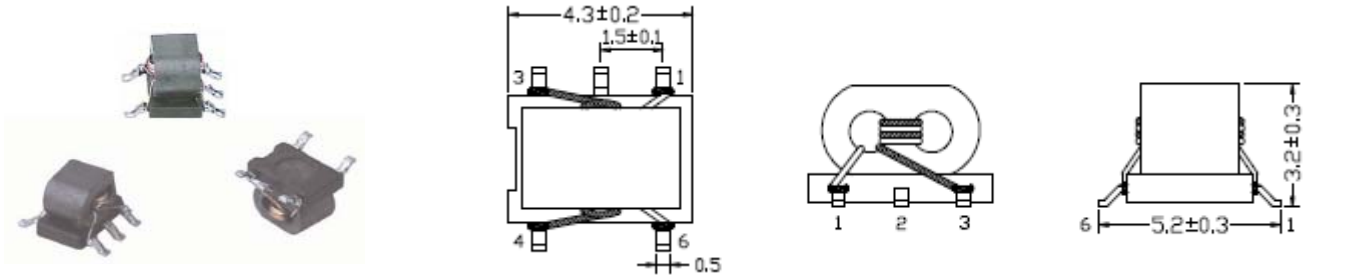

Part Number	Winding Turns	Operating Frequency Range (MHz)	Insertion Loss (dB)	PIN Connection
Double Balanced Mixer				
SB0403T-1007	2	25 ~2000	3	1
SB0403T-1009	3	6 ~2000	3	1
SB0403T-1006	3	150 ~2300	3	1
SB0403T-1010	4	3.5 ~2000	3	1
SB0403T-1018	5	2 ~2000	3	1
Frequency Mixer				
SB0403T-1025	1	-----	3	2
SB0403T-1019	2	8 ~750	3	2
SB0403T-1026	3	3.5 ~700	3	2
Balun Transfomer				
SB0403T-1021	1 1/2	20 ~750	3	3
SB0403T-1022	2 1/2	4.5 ~3300	3	3
SB0403T-1023	3 1/2	2.3 ~2700	3	3
SB0403T-1024	4 1/2	1.5 ~2400	3	3
Power Divider/Combiners				
SB0403T-1079	2	1300 ~1700	IN to OUT-1,2	4.5Max 4
SB0403T-1076	3	800 ~1000	IN to OUT- 2,	15Min 4

Features:

- Pair wire coil for high stability.
- Base PIN terminal treated,allowing mounting as is on a PCB.

Applications:

Double balance mixerx,broad-band transformers,impedance transformers,etc.

Pin Connection:




Fig:1




Fig:2




Fig:3




Fig:4